


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 24 TOWNSHIP 16 RANGE 3
DATE: 7-9-07
PARTY CHIEF: Wilcoxon
CREW: Harrison
TYPE OF MARKER: Cut 'x' in concrete street
METHOD OF ESTABLISHMENT: County: 9-27-05

IN. S.P.C. E ZONE NAD '83
NAME: 16032403
N: 508203.7348(m)
E: 59449.5859(m)

Note: set point in by
GPS coords.

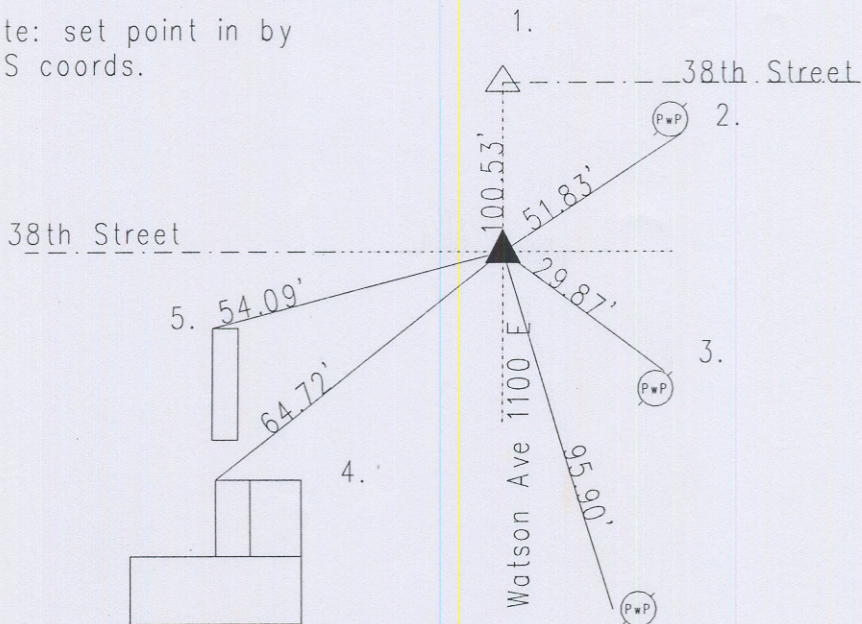

Original post set 1820 by Laughlin with witness: 15" buckeye N 15 W 11 links; 15" sugar maple S 67 E 46 links per Marion County Atlas pg. 7. Hosbrook 4-10-1851 called no stone but witness: 30" walnut S 78 1/2 W 40 links and 12" sugar maple N 17 links per Center Township Legal Survey Book pg. 5. In establishing this corner we used the Marion Highland Subdivision Plat Book 14, pg. 25 & 47. Legal survey distances and curb splits were also used. A mag nail was set as the corner. Re-tied 11-24-97 by Wilcoxon. Re-tied 6-9-02 by Wilcoxon. Re-ties 10-23-06 by Wilcoxon.

16032403

REF.	DISTANCE	DESCRIPTION
1.	100.53'	Due N to NW cor. 19-16-4 Cut 'x' in N curb of median
2.	51.83'	Mag nail w/bw SF PwP no# 10"up
3.	29.87'	Mag nail w/bw NF PwP#287-408 B 6"up
4.	64.72'	Corner of brick wall
5.	54.14'	NW corner of stone sign
6.	95.90'	Mag nail w/bw W PwP#28-408B 2"up